



Features & Benefits

- Wide range of business applications
- Small rackable 1U chassis: 12" in depth
- Support Mini-ITX M/B
- Support 1 x 3.5" HDD & slim ODD
- Additional 2.5" HDD with Chenbro storage kit for slim ODD & FDD space
- Advanced thermal solution


Specification

Model Name	• RM12800
M/B Form Factor	• Mini-ITX (6.7" x 6.7")
Dimension (D×W×H)	• 306 mm × 370 mm × 43.5 mm • 12" × 14.6" × 1.7"
Drive Bay	• Internal : 3.5" x 1 • Slim ODD : 1
PSU	• Form Factor : Flex ATX • Watt : 180 W
Indicator	• 1 x Power Status LED, 1 x HDD Activity LED, 1 x LAN Activity LED
Front Control	• Power ON/OFF, System Reset
System Security	• N/A
Cooling Fan	• Front : N/A • Middle : Optional 2 x 40 mm middle fans • Rear : Optional 1 x 40 mm rear fan
Slot Opening	• 1 x Low profile
Metal Thickness	• 1.2 mm
Net Weight (Chassis only)	• 2.8 Kg
Gross Weight (w/Packing)	• 4.3 Kg
Backplane	• N/A
Rear Window	• Standard
Front Bezel	• N/A
Cubic Feet	• 1.28
Container Info. (Single Packing)	• 20' : 790 • 40' : 1630 • 40'H : 1887

Rear View



Inside View

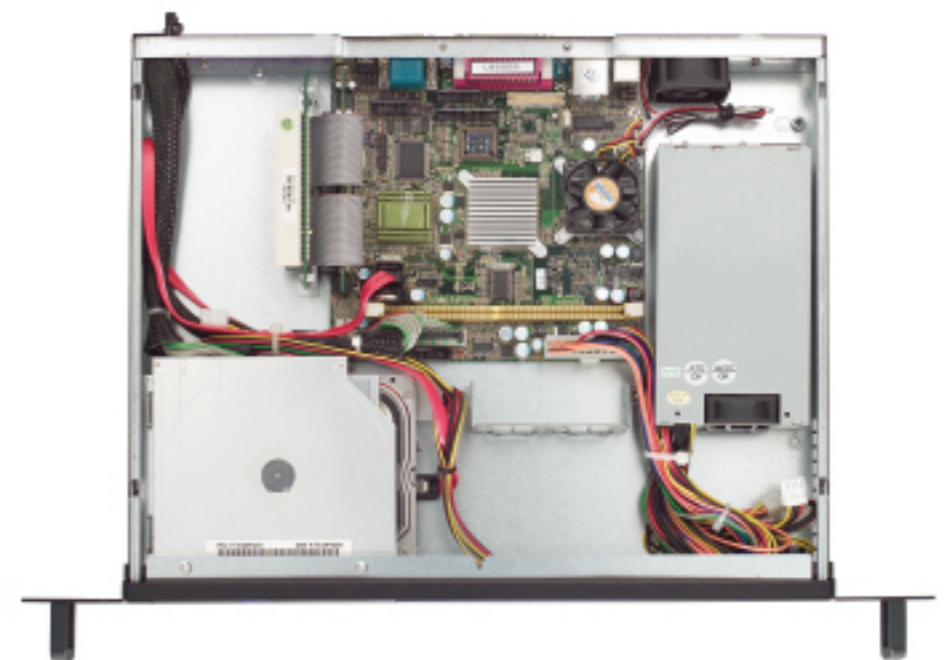

Front View



Slim ODD or 2.5 HDD with SK51102




Optional 2 x front 40 mm fans



Flex ATX PSU (180W)



Optional 1 x rear 40 mm fan

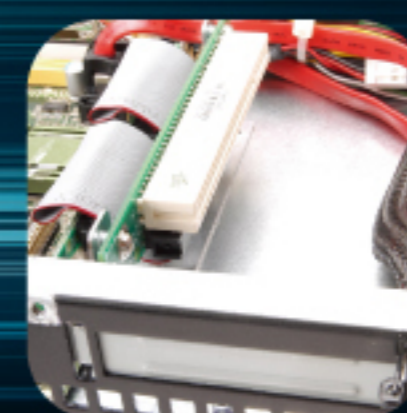

Cable-link riser for 1 x low profile add-on card



1 x Internal 3.5" bay for 3.5" or 2.5" HDD with SK41203